


POLIPAR®

Three-phase Disconnect Switch

DSA & DSH Series

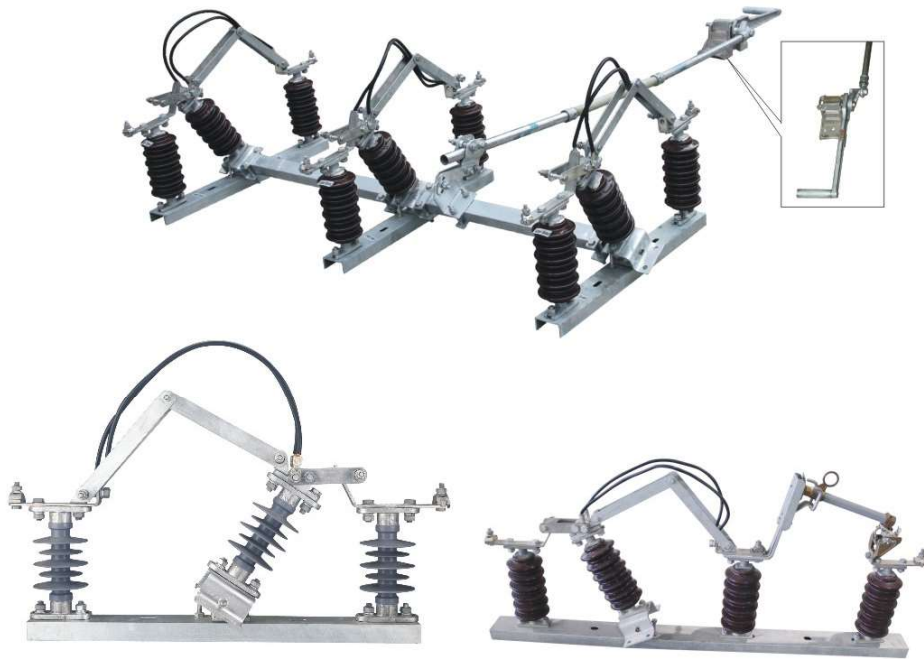

DS1 & DST Series



Main Technical Parameters									
Type	Rated voltage (KV)	Rated current (A)	Creepage distance (mm)	4S Heat steady e.c (A)	Shock voltage (A)	Impulse withstand voltage		Power-frequency withstand voltage	
						To earth (KV)	Across the isolating distance(KV)	To earth (KV)	Across the isolating distance(KV)
DSA	10-15	400-1250	300-400	12500	31500	75	95	38	42
DSA	20-27	400-1250	420-580	12500	31500	120	150	50	60
DSA	30-36	400-1250	660-900	12500	31500	170	195	70	80
DSH	10-15	400-1250	370-520	12500	31500	75	95	38	42
DSH	20-27	400-1250	600-800	12500	31500	100	120	45	50
DSH	30-36	400-1250	900-1200	12500	31500	170	195	70	80

Main Technical Parameters									
Type	Rated voltage (KV)	Rated current (A)	Creepage distance (mm)	4S Heat steady e.c (A)	Shock voltage (A)	Impulse withstand voltage		Power-frequency withstand voltage	
						To earth (KV)	Across the isolating distance(KV)	To earth (KV)	Across the isolating distance(KV)
DS1	10-15	400-1250	300-400	12500	31500	75	95	38	42
DS1	20-27	400-1250	420-580	12500	31500	120	150	50	60
DS1	30-36	400-1250	660-900	12500	31500	170	195	70	80
DST	10-15	400-1250	370-520	12500	31500	75	95	38	42
DST	20-27	400-1250	600-800	12500	31500	100	120	45	50
DST	30-36	400-1250	900-1200	12500	31500	170	195	70	80